



8165 E. Kaiser Blvd. Anaheim, CA 92808
p. 714.282.2270
f. 714.676.5558

Photometric Test Report

IES ROAD REPORT

PHOTOMETRIC FILENAME : L031601306.IES

DESCRIPTIVE INFORMATION (From Photometric File)

IESNA:LM-63-2002
[TEST] L031601306
[TESTLAB] LIGHT LABORATORY, INC.
[ISSUEDATE] 3/14/2016
[MANUFAC] VIVA RAILINGS
[LUMCAT] 3000K LED High/Clear
[LUMINAIRE] 1.5"L. X 40"W. X 1.25"H. RAIL LIGHT
[MORE] 3000K LED High Power Clear
[BALLASTCAT] N/A
[LAMPPOSITION] 0,0
[LAMPCAT] N/A
[OTHER] INDICATING THE CANDELA VALUES ARE ABSOLUTE AND
[MORE] SHOULD NOT BE FACTORED FOR DIFFERENT LAMP RATINGS.
[TEST CONDITION] CANDELA VALUES ARE GENERATED FROM LIGHT LABORATORY L031601302
[MORE] BY USING TILT OF 30 DEGREES
[POWER SUPPLY] 12VDC CONSTANT VOLTAGE SOURCE
[INPUT] 12VDC, 14.91W
[TEST PROCEDURE] IESNA:LM-79-08

CHARACTERISTICS

IES Classification	Type III
Longitudinal Classification	Very Short
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	841
Downward Total Efficiency	N.A. (absolute)
Total Luminaire Efficiency	N.A. (absolute)
Luminaire Efficacy Rating (LER)	56
Total Luminaire Watts	14.91
Ballast Factor	1.00
Upward Waste Light Ratio	0.04
Maximum Candela	429.33
Maximum Candela Angle	0H 30V
Maximum Candela (<90 Degrees Vertical)	429.33
Maximum Candela Angle (<90 Degrees Vertical)	0H 30V
Maximum Candela At 90 Degrees Vertical	82.23 (9.8% Luminaire Lumens)
Maximum Candela from 80 to <90 Degrees Vertical	121.46 (14.4% Luminaire Lumens)
Cutoff Classification (deprecated)	N.A. (absolute)

IES ROAD REPORT
PHOTOMETRIC FILENAME : L031601306.IES

LUMINAIRE CLASSIFICATION SYSTEM (LCS)

	Lumens	% Lamp	% Luminaire
FL - Front-Low (0-30)	137.4	N.A.	16.3
FM - Front-Medium (30-60)	343.6	N.A.	40.9
FH - Front-High (60-80)	144.8	N.A.	17.2
FVH - Front-Very High (80-90)	35.0	N.A.	4.2
BL - Back-Low (0-30)	65.0	N.A.	7.7
BM - Back-Medium (30-60)	75.2	N.A.	8.9
BH - Back-High (60-80)	8.2	N.A.	1.0
BVH - Back-Very High (80-90)	0.2	N.A.	0.0
UL - Uplight-Low (90-100)	19.2	N.A.	2.3
UH - Uplight-High (100-180)	12.0	N.A.	1.4
Total	840.6	N.A.	100.0
BUG Rating	B0-U2-G1		

IES ROAD REPORT
PHOTOMETRIC FILENAME : L031601306.IES

CANDELA TABULATION

Vert. Angles	Horizontal Angles									
	<u>0</u>	<u>5</u>	<u>10</u>	<u>15</u>	<u>20</u>	<u>25</u>	<u>30</u>	<u>35</u>	<u>40</u>	<u>45</u>
0	245.17	245.17	245.17	245.17	245.17	245.17	245.17	245.17	245.17	245.17
5	281.41	281.50	281.58	280.21	279.18	277.85	276.37	274.63	272.64	270.41
10	323.78	323.91	322.17	320.46	317.89	314.75	310.92	306.38	301.61	296.24
15	362.88	362.37	360.75	357.97	354.22	349.49	343.89	337.71	330.49	322.17
20	396.19	395.56	393.37	389.91	385.44	380.14	373.32	365.05	356.14	345.65
25	421.36	420.27	417.59	414.48	410.53	404.02	396.99	387.37	376.60	364.17
30	429.33	428.54	427.74	425.12	422.43	417.68	411.94	402.58	391.67	377.34
35	421.36	420.58	419.29	419.18	417.11	414.81	409.72	403.33	394.98	383.46
40	396.19	396.01	395.17	394.82	395.01	393.54	392.26	389.10	383.79	374.23
45	362.88	362.83	362.15	361.95	362.12	361.27	360.03	358.35	355.59	352.68
50	323.78	323.59	323.20	323.09	322.94	322.65	320.77	319.46	317.25	316.18
55	281.41	281.54	281.83	281.76	280.38	278.69	277.01	275.40	274.51	274.24
60	245.17	244.80	243.65	242.80	241.72	238.27	234.50	230.95	228.44	229.22
65	200.61	201.29	202.44	203.20	203.03	202.39	199.40	194.78	188.88	185.05
70	164.79	164.74	164.80	165.45	164.84	162.45	162.21	161.63	157.69	150.56
75	147.75	147.33	145.49	142.59	139.74	136.52	131.58	129.30	127.56	122.59
80	121.41	121.46	121.36	120.58	118.95	115.65	111.26	106.36	101.92	96.78
85	99.34	99.18	98.61	97.34	95.66	93.22	90.17	86.64	81.52	75.92
90	82.23	81.86	80.68	78.67	76.03	72.72	68.98	65.67	61.56	55.71
95	68.05	67.47	65.78	63.05	59.51	55.46	51.33	47.28	43.12	38.01
100	52.94	52.41	50.84	48.12	44.59	40.80	36.73	32.20	28.01	23.82
105	44.80	43.77	41.20	37.29	33.05	28.53	24.10	19.87	16.30	12.72
110	39.43	38.49	35.51	30.81	25.56	20.14	14.97	10.33	6.71	3.70
115	24.33	24.37	22.35	19.37	14.67	9.03	4.10	0.64	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

Vert. Angles	Horizontal Angles									
	<u>50</u>	<u>55</u>	<u>60</u>	<u>65</u>	<u>70</u>	<u>75</u>	<u>80</u>	<u>85</u>	<u>90</u>	<u>95</u>
0	245.17	245.17	245.17	245.17	245.17	245.17	245.17	245.17	245.17	245.17
5	267.97	265.34	262.55	259.63	256.61	253.51	250.35	247.18	243.49	239.75
10	290.39	284.54	278.60	272.44	266.08	259.58	253.00	246.19	239.32	232.46
15	313.29	303.96	294.09	283.78	273.26	262.66	252.92	243.68	234.36	224.99
20	333.56	320.97	307.26	292.68	277.90	263.58	250.46	237.87	225.82	213.46
25	349.82	335.20	317.19	299.14	280.39	261.54	243.52	228.18	214.39	201.09
30	361.66	343.31	323.61	302.48	280.11	257.49	235.61	216.00	200.12	185.40
35	367.59	348.20	326.13	302.60	278.00	252.32	225.97	203.52	184.34	169.26
40	362.81	347.41	327.00	301.48	274.63	246.41	217.11	189.61	167.53	151.81
45	346.48	335.76	321.62	299.04	270.59	239.67	206.47	173.89	148.62	131.43
50	316.35	314.38	304.42	289.26	263.29	229.69	193.19	155.95	127.89	110.26
55	275.35	277.71	278.20	266.27	246.81	214.25	175.57	136.53	104.50	87.80

IES ROAD REPORT
PHOTOMETRIC FILENAME : L031601306.IES

CANDELA TABULATION - (Cont.)

60	231.38	232.69	234.48	232.64	216.32	189.73	152.53	112.89	80.03	63.29
65	183.23	183.83	184.14	182.38	174.10	152.85	121.48	85.23	57.06	41.97
70	142.26	135.46	133.09	129.88	122.83	106.48	85.53	58.48	36.64	25.16
75	114.24	102.19	91.34	80.57	74.74	65.88	54.08	35.83	22.08	13.81
80	90.26	78.97	64.93	51.21	41.52	34.25	27.77	19.96	11.02	6.20
85	69.12	59.50	46.46	33.81	23.78	17.09	12.02	8.30	3.82	1.56
90	49.87	41.36	30.99	21.61	13.53	8.52	4.29	2.13	0.00	0.00
95	32.04	25.53	17.92	11.82	6.10	2.89	0.56	0.00	0.00	0.00
100	19.15	13.96	8.37	4.32	1.19	0.00	0.00	0.00	0.00	0.00
105	8.89	5.16	1.54	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.59	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

**Vert.
Angles**

Horizontal Angles

	<u>100</u>	<u>105</u>	<u>110</u>	<u>115</u>	<u>120</u>	<u>125</u>	<u>130</u>	<u>135</u>	<u>140</u>	<u>145</u>
0	245.17	245.17	245.17	245.17	245.17	245.17	245.17	245.17	245.17	245.17
5	236.05	232.43	228.89	225.47	222.19	219.05	216.08	213.30	210.73	208.37
10	225.64	218.87	212.20	205.68	199.53	193.95	188.81	184.10	179.84	176.24
15	215.00	204.43	194.35	184.73	175.61	168.62	164.38	160.73	157.75	155.36
20	200.64	187.51	175.77	166.11	157.97	151.65	146.99	143.28	139.60	135.99
25	185.90	170.51	156.00	146.92	140.71	135.89	131.35	125.78	120.03	115.07
30	169.88	153.84	140.79	131.38	124.94	118.78	112.11	105.37	99.54	94.61
35	152.89	136.54	124.56	115.17	108.10	100.83	93.35	86.46	80.92	77.00
40	136.21	120.93	108.50	99.43	91.79	83.23	75.37	68.71	64.02	60.72
45	117.60	103.79	91.59	83.14	74.48	65.91	58.49	52.74	48.38	45.40
50	98.59	86.37	75.95	66.47	57.54	49.41	43.12	38.13	34.53	32.07
55	76.75	68.04	59.17	49.53	41.43	34.34	29.01	25.07	21.85	20.12
60	55.09	48.40	40.91	32.86	27.34	21.72	17.37	14.01	11.41	10.07
65	35.34	30.13	25.09	19.08	15.25	11.31	7.67	4.69	2.01	0.00
70	20.49	15.94	12.57	8.63	5.76	2.69	0.00	0.00	0.00	0.00
75	10.05	6.65	4.20	1.57	0.00	0.00	0.00	0.00	0.00	0.00
80	3.40	1.32	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

IES ROAD REPORT
PHOTOMETRIC FILENAME : L031601306.IES


CANDELA TABULATION - (Cont.)

135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

Vert. Horizontal Angles

	<u>150</u>	<u>155</u>	<u>160</u>	<u>165</u>	<u>170</u>	<u>175</u>	<u>180</u>
0	245.17	245.17	245.17	245.17	245.17	245.17	245.17
5	206.41	204.75	203.35	202.23	201.40	200.86	200.61
10	173.18	170.57	168.42	166.84	165.73	165.05	164.79
15	153.35	151.69	150.31	149.22	148.45	147.96	147.75
20	132.54	129.33	126.58	124.41	122.77	121.84	121.41
25	110.74	107.19	104.27	102.13	100.53	99.68	99.34
30	90.97	88.05	85.84	84.20	83.10	82.45	82.23
35	74.05	71.91	70.35	69.29	68.56	68.14	68.05
40	58.21	56.25	54.84	53.92	53.29	52.97	52.94
45	43.36	42.15	41.87	42.58	43.45	44.26	44.80
50	30.87	31.25	33.22	35.71	37.75	39.00	39.43
55	20.46	22.74	24.72	25.48	25.21	24.62	24.33
60	9.67	8.69	6.56	4.00	1.83	0.46	0.00
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00


COEFFICIENTS OF UTILIZATION

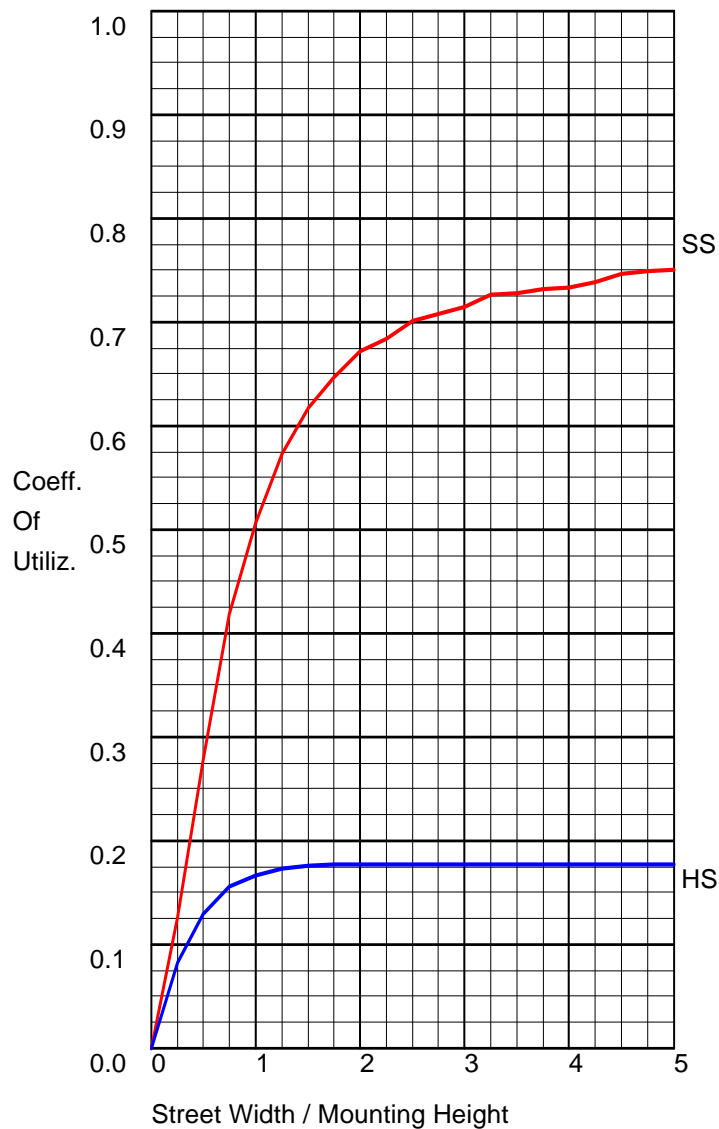

FLUX DISTRIBUTION


	Lumens	Percent Of Luminaire
Downward Street Side	660.8	78.6
Downward House Side	148.6	17.7
Downward Total	809.4	96.3
Upward Street Side	31.1	3.7
Upward House Side	0.0	0.0
Upward Total	31.1	3.7
Total Flux	840.5	100.0

POLAR GRAPH

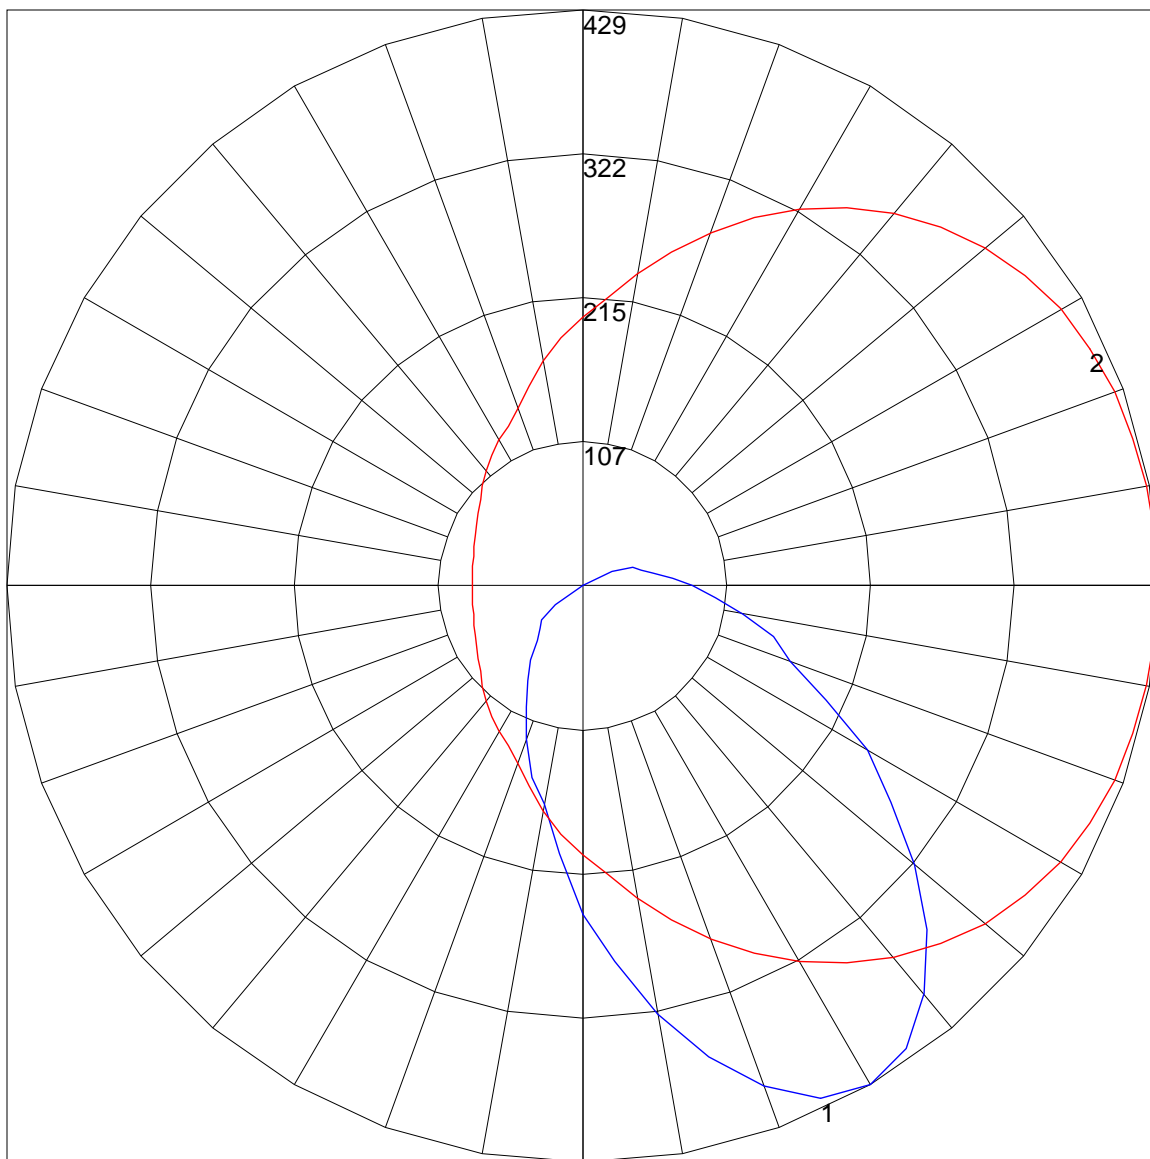


Maximum Candela = 429.33 Located At Horizontal Angle = 0, Vertical Angle = 30
1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)
2 - Horizontal Cone Through Vertical Angle (30) (Through Max. Cd.)

ISOFOOTCANDLE LINES OF HORIZONTAL ILLUMINANCE

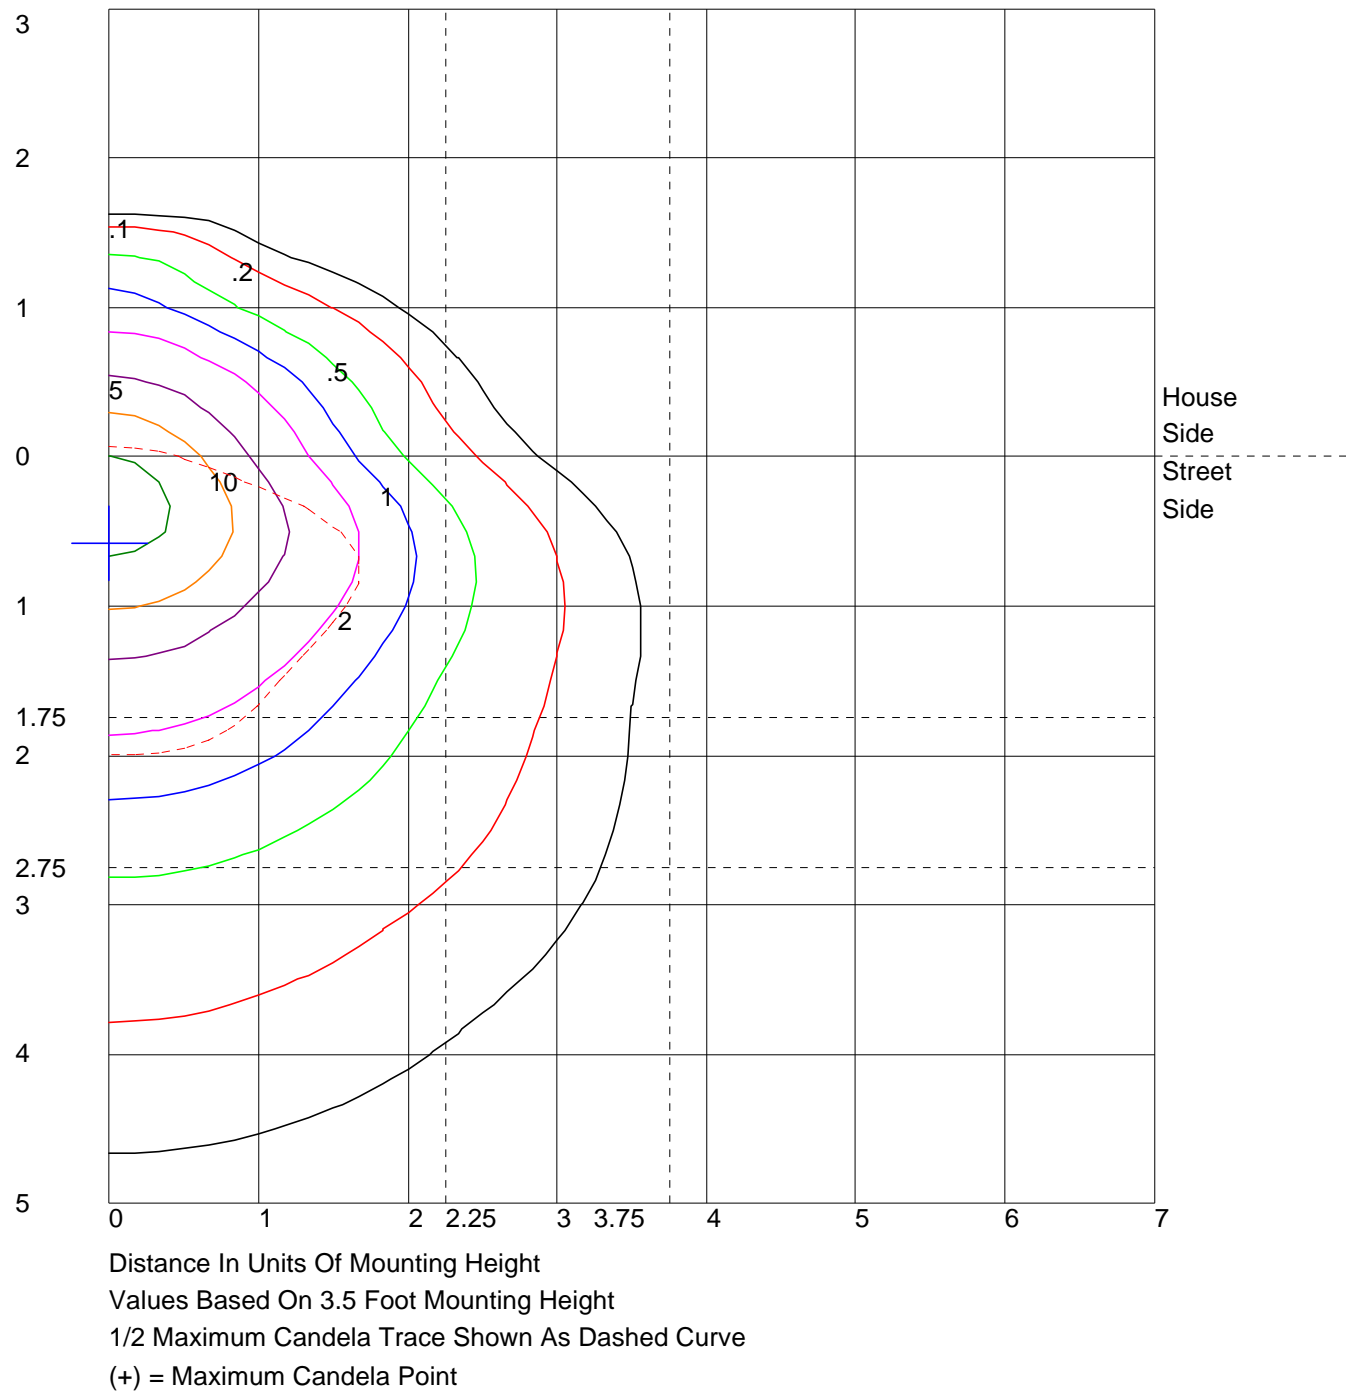

LUMINAIRE CLASSIFICATION SYSTEM (LCS) GRAPH

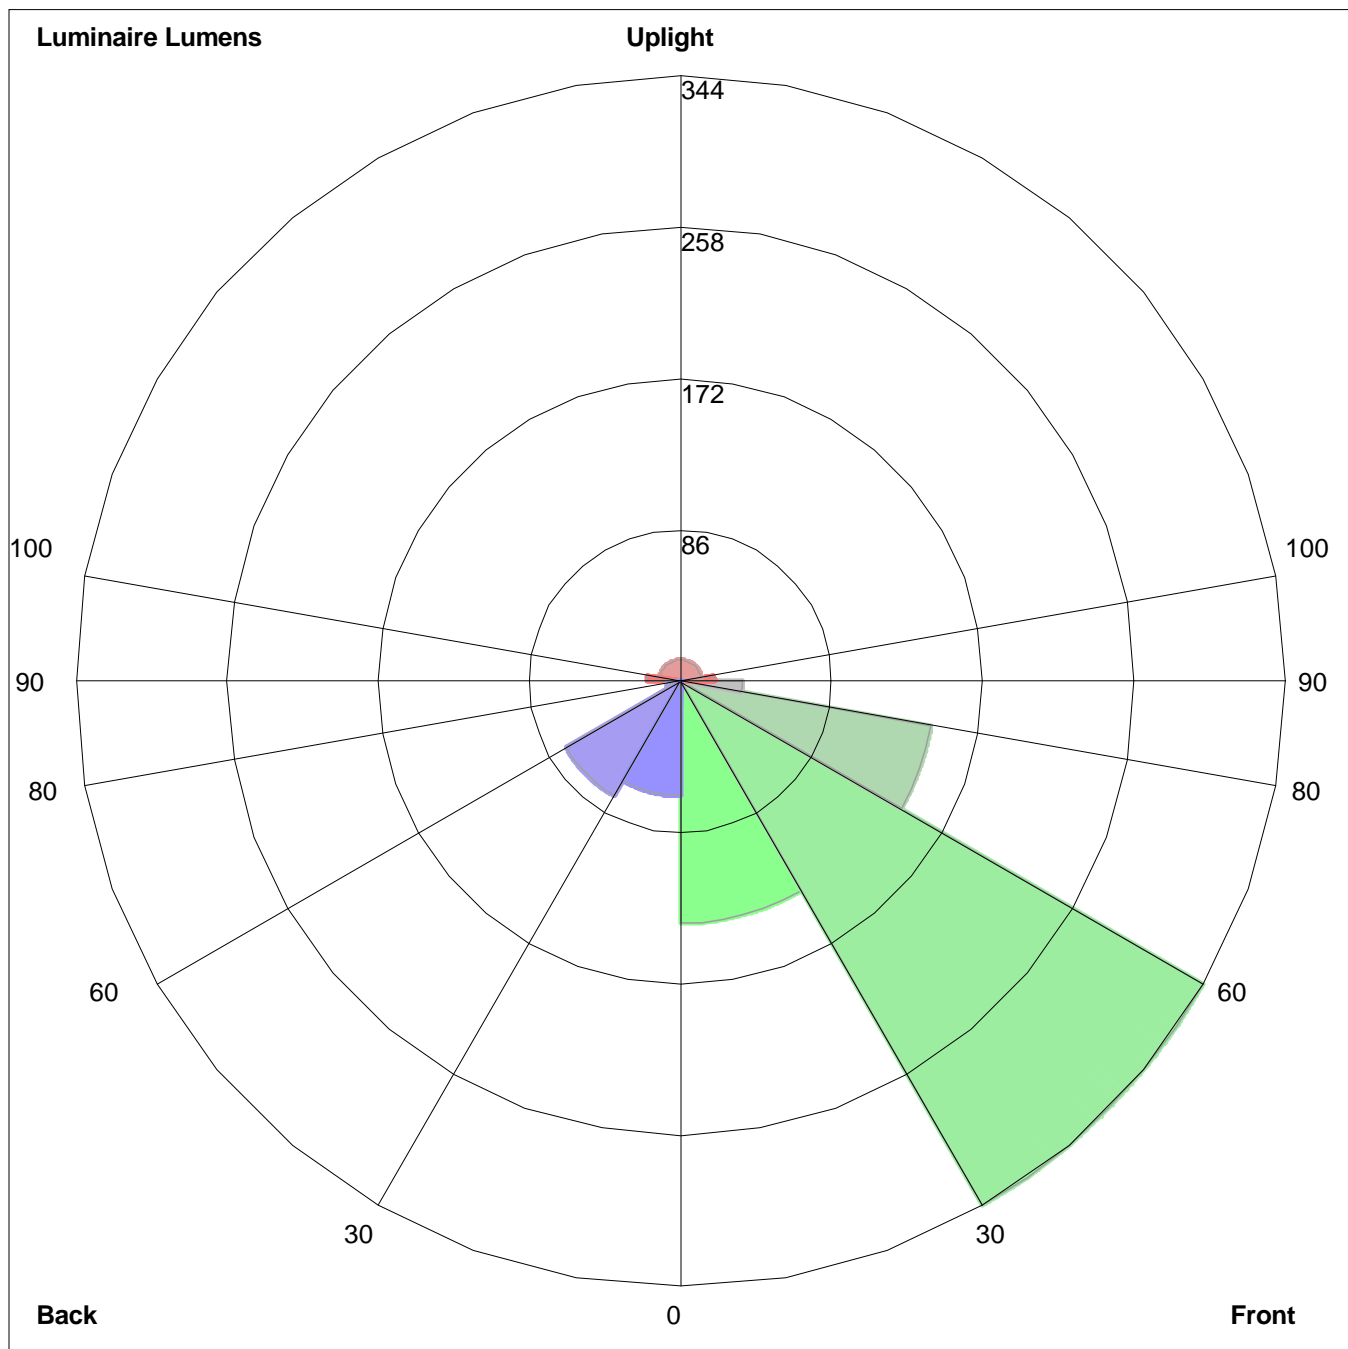

Luminaire Lumens:
Front: Low=137.4, Medium=343.6, High=144.8, Very High=35.0
Back: Low=65.0, Medium=75.2, High=8.2, Very High=0.2
Uplight: Low=19.2, High=12.0

BUG Rating : B0-U2-G1