

SHOE - AVAILABLE INFILLS

Glass

SHOETM GLASS RAILING SYSTEM

PRODUCT DATA



VIVA RAILINGS[®]
LEADERS IN ARCHITECTURAL RAILING SYSTEMS


DESIGN • ENGINEER • FABRICATE • INSTALL



SHOE™ GLASS RAILING SYSTEM

SHOE - AVAILABLE INFILLS

Glass

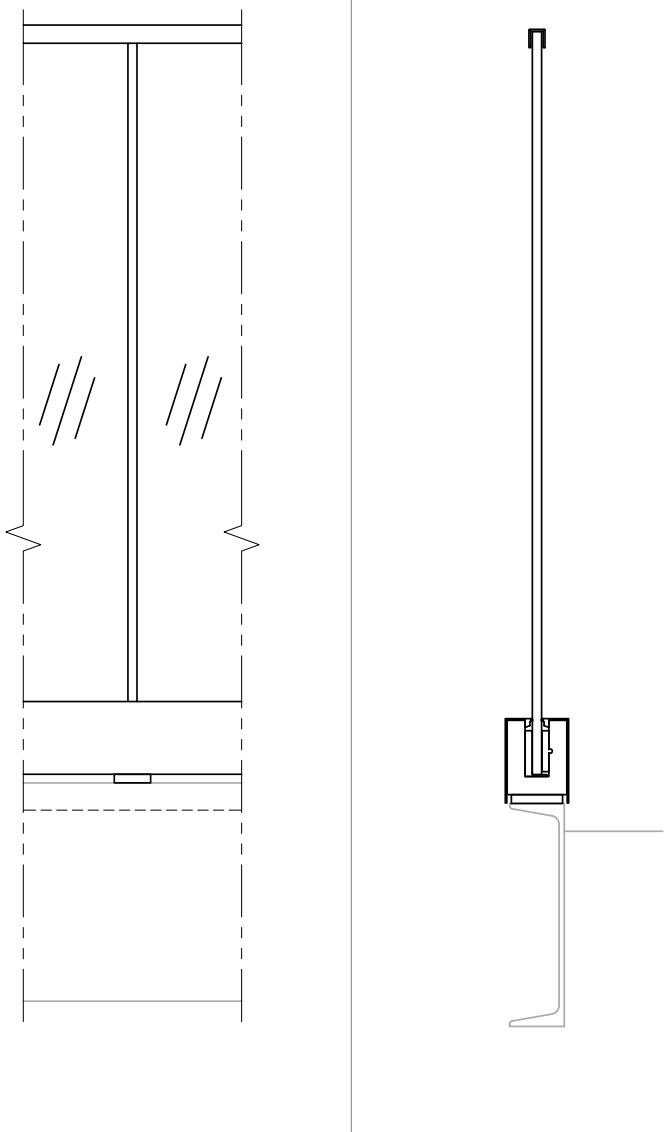


Other mounting options available.

Our ICC-ES 4405 Certified SHOE™ Structural Glass Railing System is an aluminum glass railing system with a patented compression set (US Patent No. 9127474) aluminum base shoe system.

ESR-4405 - ICC Evaluation Service, LLC (ICC-ES)



SHOE™ GLASS SYSTEM - TECHNICAL DATA



	MATERIAL	FINISH	SIZE/SPACING
BASE	Aluminum SHOE	Mill	3.25"x4" SHOE base, 5'-0" max. O.C. glass infill. Fascia or Top mount.
CLADDING	Aluminum - \$ ⁶	Powder Coat #6 Satin SS Anodized	4.5"x1" Cladding for SHOE only.
	Stainless Steel - \$\$	#6 Satin	
INFILL	Glass	Clear, Digitally Printed, Tinted, Colored Interlayer	1/2" to 1" Laminated Tempered Glass ¹ PVB or SGP ⁴ interlayer.
TOP RAIL	Stainless Steel U-Cap	#6 Satin	1" Height U-Cap
	Stainless Steel U-Cap with LED ²		1" Height U-Cap with LED LINEAR
	Stainless Steel Tube with LED		Ø1-1/2" tube with LED LINEAR
HAND RAIL	Stainless Steel Tube	#6 Satin	Ø1-1/2" or Ø2" tube
	Stainless Steel Tube with LED		Ø1-1/2" with LED linear, Ø1-1/2" or Ø2" with LED Pod
	Wood (Red Oak, Cherry or Maple) ³	Unstained	Ø2" for Hand Rail
	Wood (Red Oak, Cherry or Maple) with LED		Ø2" with LED LINEAR



Intertek

1. Thickness and interlayer type typically to be determined based on engineering requirements.
2. All LED LINEAR products are ETL certified; ETL mark is proof of product compliance to North American safety standard.
3. Other species available upon request.
4. Viva Railings recommends using SGP for external applications.
5. CeraShield: Ceramic Coating, Enhanced durability and superior protection. Available in a wide range of colors. (Replaces traditional powder coat finish options.)
6. \$ to \$\$\$: Indicates finish type comparative cost.



Continuous Compression DrySet
U.S. PATENT NO. 9127474



CERTIFIED FOR

- International Building Code (IBC 2024)
- California Building Code (CBC 2019-2022) OSHPD, DSA
- Florida Building Code – Building (FBC 2020) includes Wind Borne Debris Regions & High-Velocity Hurricane Zone (HVHZ)



151 W. Vista Ridge Mall Dr. Lewisville, TX 75067



972-353-8482



info@vivarailings.com



vivarailings.com



GLASS



AVAILABLE GLASS TYPES



Clear Laminated
(PVB or SGP)



Tinted




Colored Interlayer



Frosted




Ceramic Frit

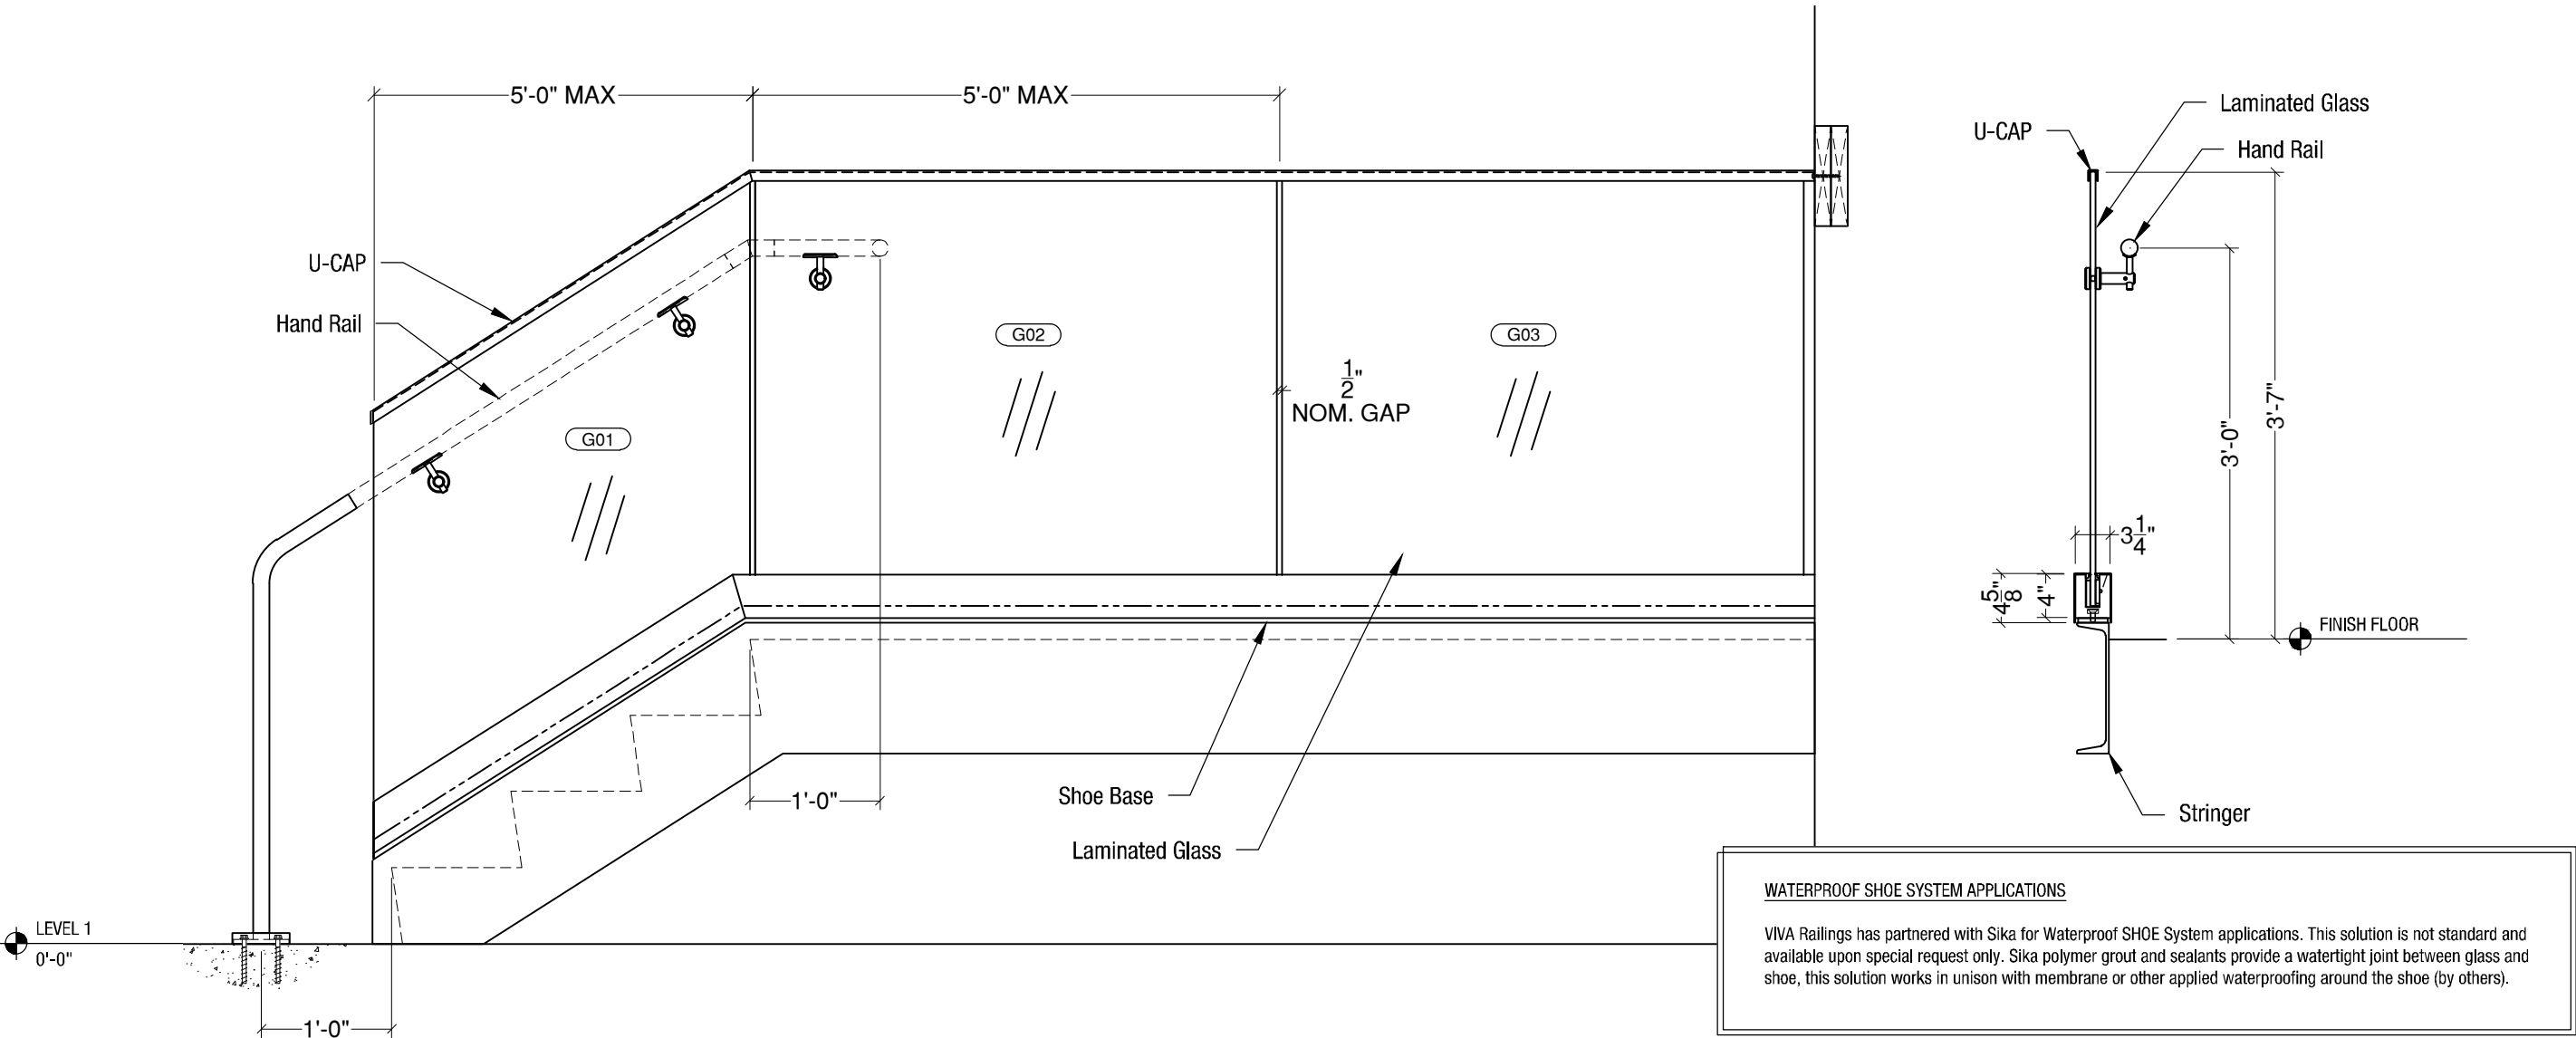

VIVA RAILINGS IS NOT RESPONSIBLE FOR THE STRUCTURAL INTEGRITY OF ANY BUILDING SYSTEMS OR OTHER MATERIALS NOT FURNISHED BY VIVA RAILINGS. VIVA RAILINGS HAS NO WAY OF KNOWING AND SPECIFICALLY DISCLAIMS WHETHER OR NOT THE BUILDING SYSTEMS TO WHICH VIVA RAILINGS' PRODUCTS ARE TO BE ATTACHED ARE STRUCTURALLY SOUND OR DESIGNED TO PROPERLY SUPPORT VIVA RAILINGS'S MATERIALS. ANY SUCH DESIGN RESPONSIBILITY BELONGS TO OTHERS FOR WHOM VIVA RAILINGS IS NOT RESPONSIBLE. THESE DRAWINGS ARE INTENDED FOR THE SOLE USE OF VIVA RAILINGS' CUSTOMER AND THEIR AGENTS FOR THE INSTALLATION OF PRODUCTS FURNISHED BY VIVA RAILINGS. VIVA RAILINGS REMAINS THE SOLE OWNER OF ALL DESIGNS AND INTELLECTUAL PROPERTY CONTAINED WITHIN. REPRODUCTION AND USE OF THESE DESIGNS FOR ANY OTHER PURPOSE IS FORBIDDEN. SCALES ARE PROVIDED FOR REFERENCE ONLY. FOR PRODUCT INFORMATION AND TECHNICAL SUPPORT, PLEASE CONTACT VIVA RAILINGS.




ORIENTATION OPTIONS

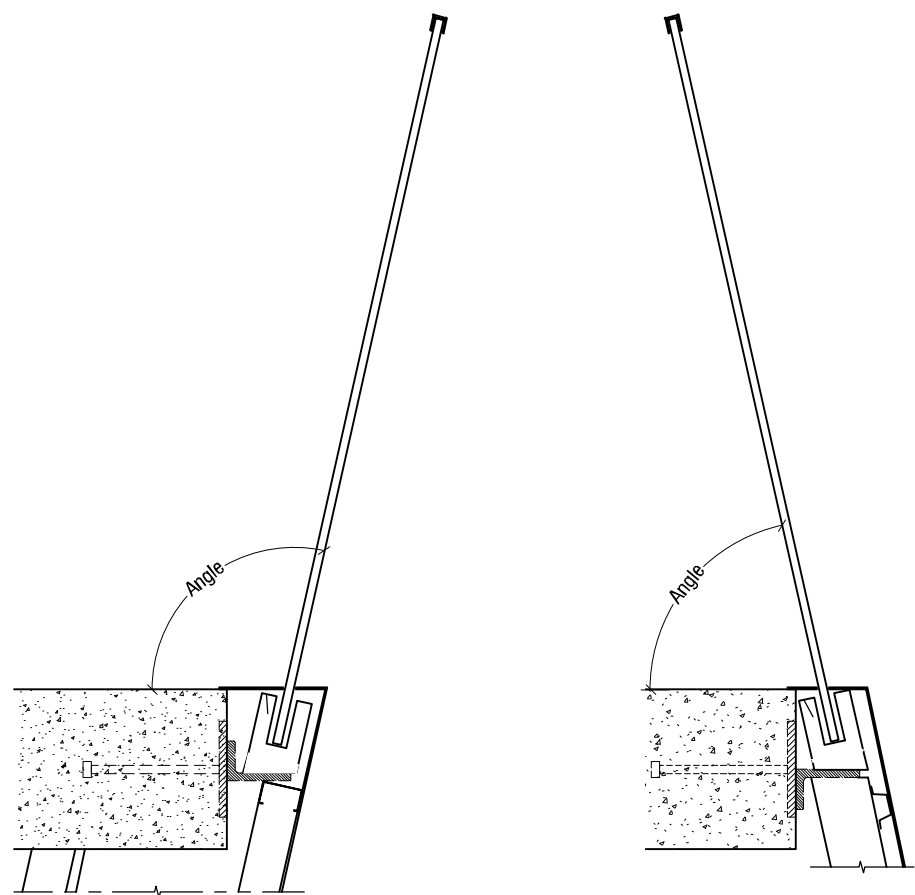

Obtuse Angle Tilt Shoe

Acute Angle Tilt

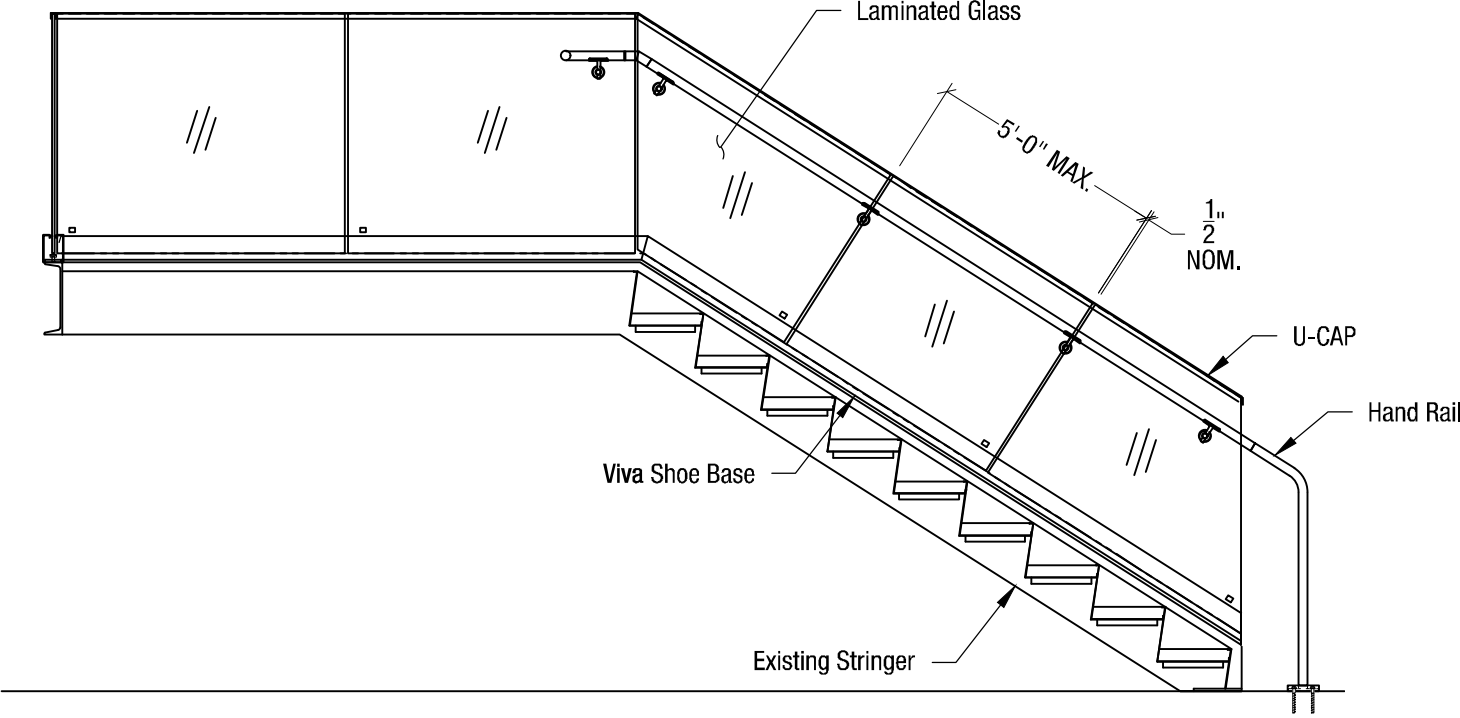


Perpendicular Panels at Stair

VIVA RAILINGS IS NOT RESPONSIBLE FOR THE STRUCTURAL INTEGRITY OF ANY BUILDING SYSTEMS OR OTHER MATERIALS NOT FURNISHED BY VIVA RAILINGS. VIVA RAILINGS HAS NO WAY OF KNOWING AND SPECIFICALLY DISCLAIMS WHETHER OR NOT THE BUILDING SYSTEMS TO WHICH VIVA RAILINGS' PRODUCTS ARE TO BE ATTACHED ARE STRUCTURALLY SOUND OR DESIGNED TO PROPERLY SUPPORT VIVA RAILINGS'S MATERIALS. ANY SUCH DESIGN RESPONSIBILITY BELONGS TO OTHERS FOR WHOM VIVA RAILINGS IS NOT RESPONSIBLE. THESE DRAWINGS ARE INTENDED FOR THE SOLE USE OF VIVA RAILINGS' CUSTOMER AND THEIR AGENTS FOR THE INSTALLATION OF PRODUCTS FURNISHED BY VIVA RAILINGS. VIVA RAILINGS REMAINS THE SOLE OWNER OF ALL DESIGNS AND INTELLECTUAL PROPERTY CONTAINED WITHIN. REPRODUCTION AND USE OF THESE DESIGNS FOR ANY OTHER PURPOSE IS FORBIDDEN. SCALES ARE PROVIDED FOR REFERENCE ONLY. FOR PRODUCT INFORMATION AND TECHNICAL SUPPORT, PLEASE CONTACT VIVA RAILINGS.




MOUNTING CONDITION, TOP MOUNTED POST

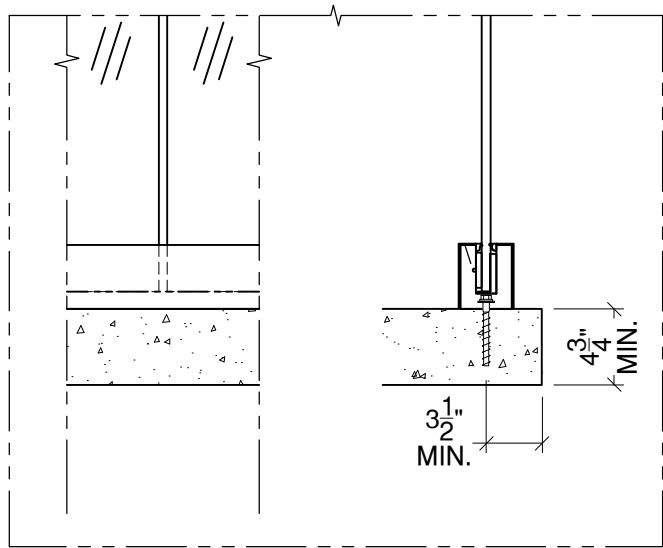


Anchored to Concrete ¹ - \$ ²

Detail# SH-T01 ³

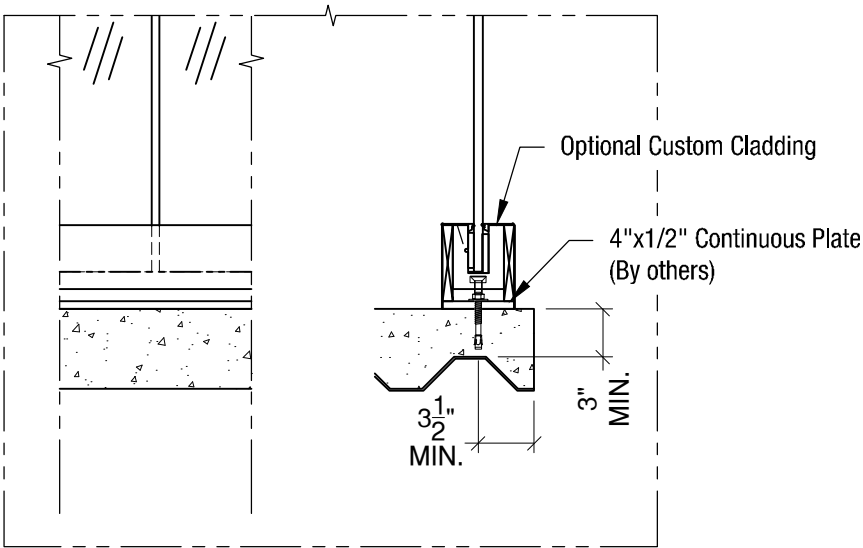


Anchored to Concrete Slab on Deck - \$\$\$

Detail# SH-T02

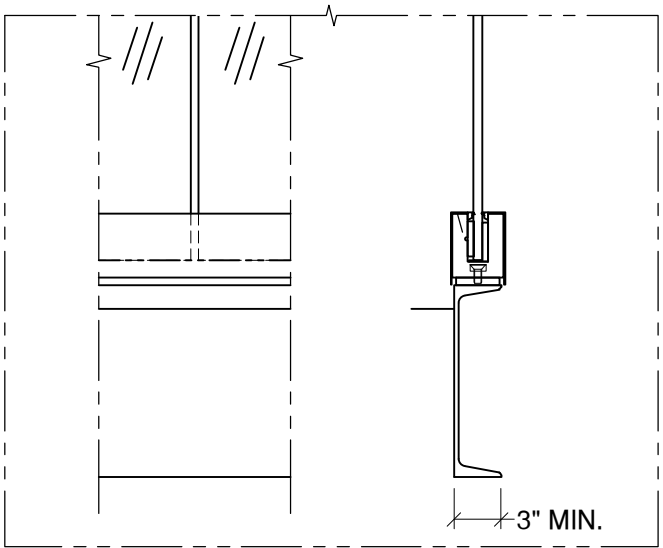


Welded @ Steel Channel - \$

Detail# SH-T03

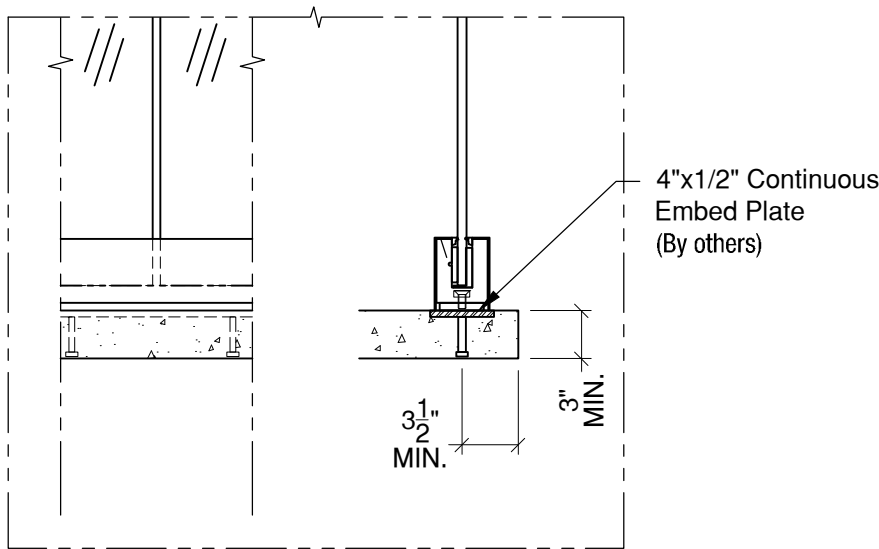

Welded @ Embed Plate - \$

Detail# SH-T04

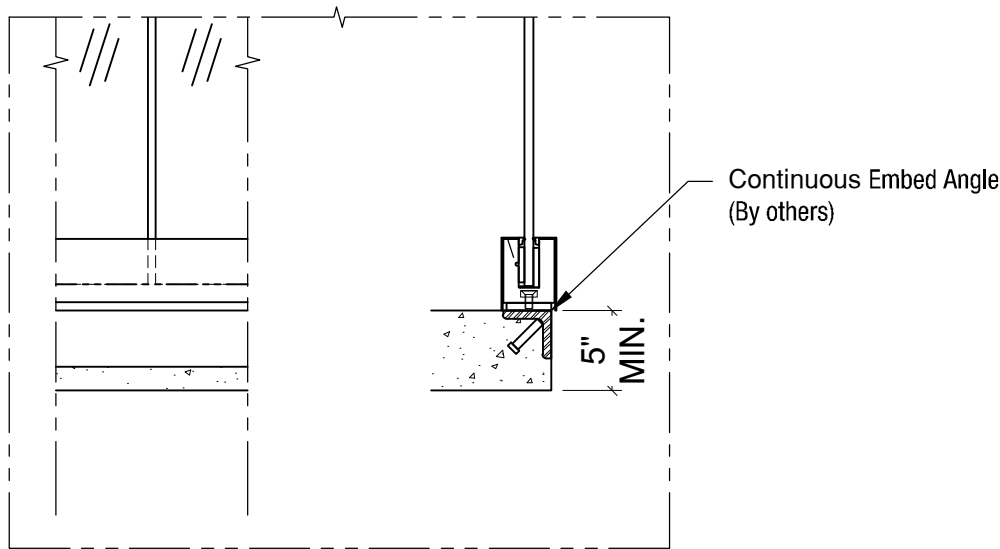


Welded @ Embed Angle - \$\$\$

Detail# SH-T05


(1) Min. 4000 PSI concrete, Typ.
(2) \$ to \$\$\$: Indicates mounting type comparative cost




MOUNTING CONDITION, FASCIA MOUNTED POST

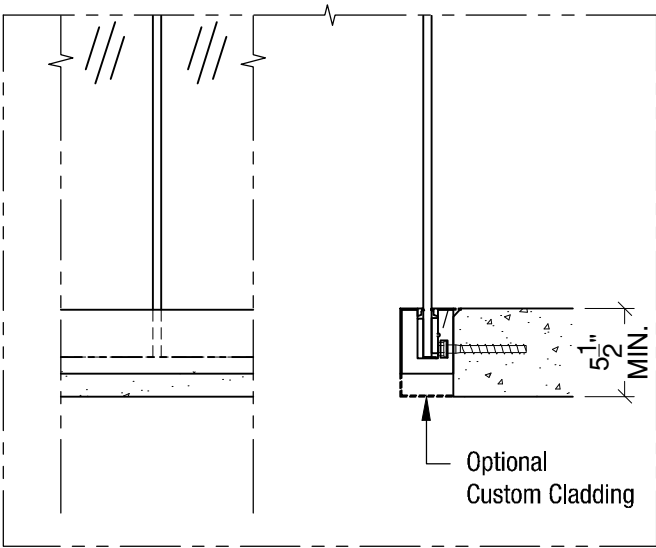


Anchored to Concrete ¹ - \$\$\$
Detail# SH-F01

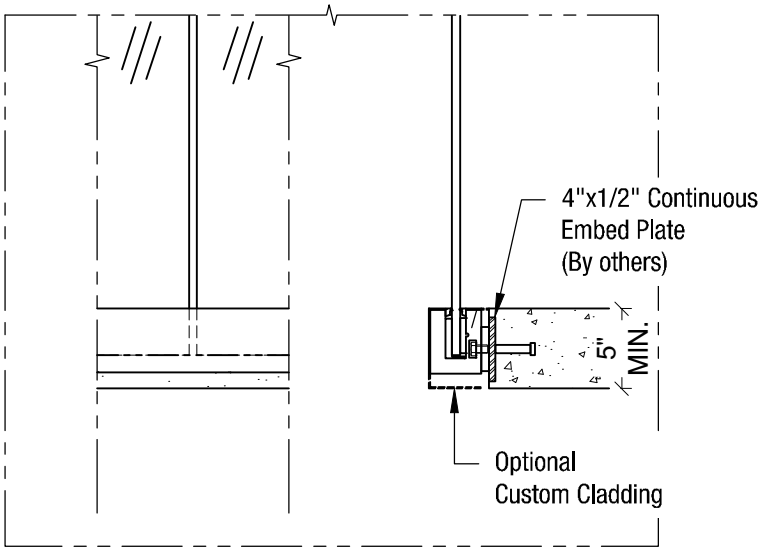


Welded @ Embed Plate - \$\$
Detail# SH-F02

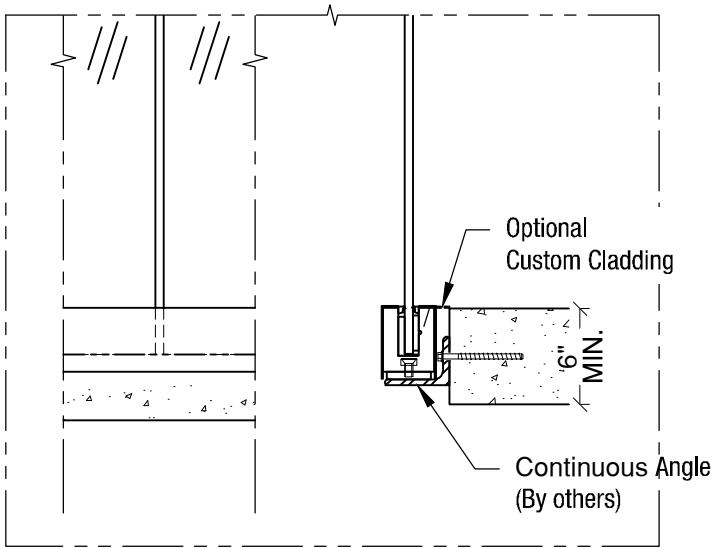


Welded @ Steel Angle Anchored @
Concrete - \$\$
Detail# SH-F03

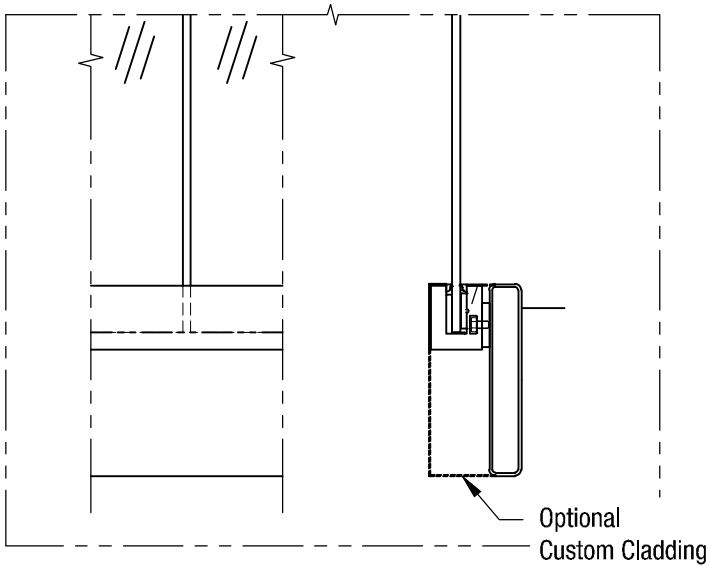

Welded @ Steel Tube - \$\$
Detail# SH-F04

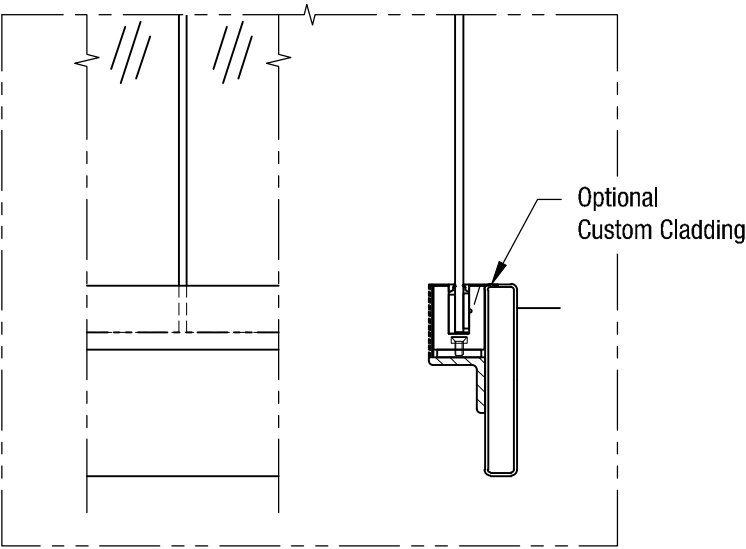

Welded @ Steel Angle Welded
@ Steel Tube - \$\$
Detail# SH-F05

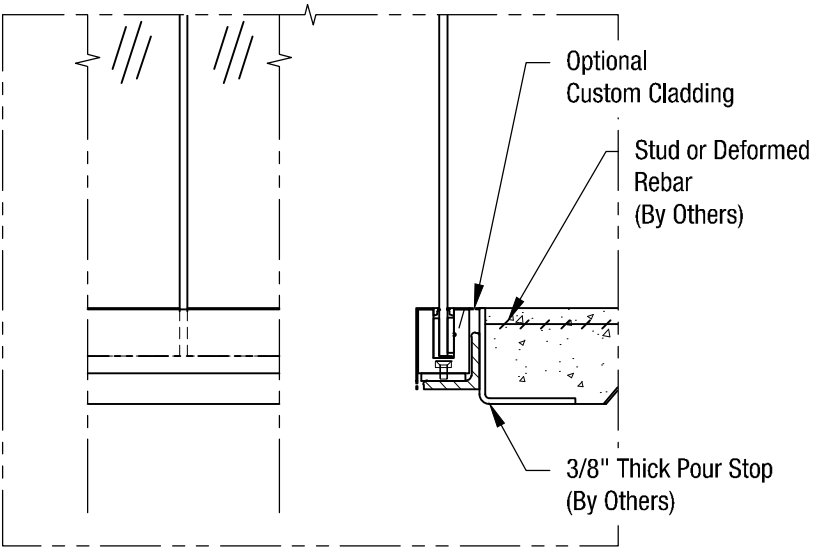




Welded @ Steel Angle - \$\$
Detail# SH-F07

(1) Min. 4000 PSI concrete, Typ.

VIVA RAILINGS IS NOT RESPONSIBLE FOR THE STRUCTURAL INTEGRITY OF ANY BUILDING SYSTEMS OR OTHER MATERIALS NOT FURNISHED BY VIVA RAILINGS. VIVA RAILINGS HAS NO WAY OF KNOWING AND SPECIFICALLY DISCLAIMS WHETHER OR NOT THE BUILDING SYSTEMS TO WHICH VIVA RAILINGS' PRODUCTS ARE TO BE ATTACHED ARE STRUCTURALLY SOUND OR DESIGNED TO PROPERLY SUPPORT VIVA RAILINGS'S MATERIALS. ANY SUCH DESIGN RESPONSIBILITY BELONGS TO OTHERS FOR WHOM VIVA RAILINGS IS NOT RESPONSIBLE. THESE DRAWINGS ARE INTENDED FOR THE SOLE USE OF VIVA RAILINGS' CUSTOMER AND THEIR AGENTS FOR THE INSTALLATION OF PRODUCTS FURNISHED BY VIVA RAILINGS. VIVA RAILINGS REMAINS THE SOLE OWNER OF ALL DESIGNS AND INTELLECTUAL PROPERTY CONTAINED WITHIN. REPRODUCTION AND USE OF THESE DESIGNS FOR ANY OTHER PURPOSE IS FORBIDDEN. SCALES ARE PROVIDED FOR REFERENCE ONLY. FOR PRODUCT INFORMATION AND TECHNICAL SUPPORT, PLEASE CONTACT VIVA RAILINGS.



ILLUMINATED RAILING

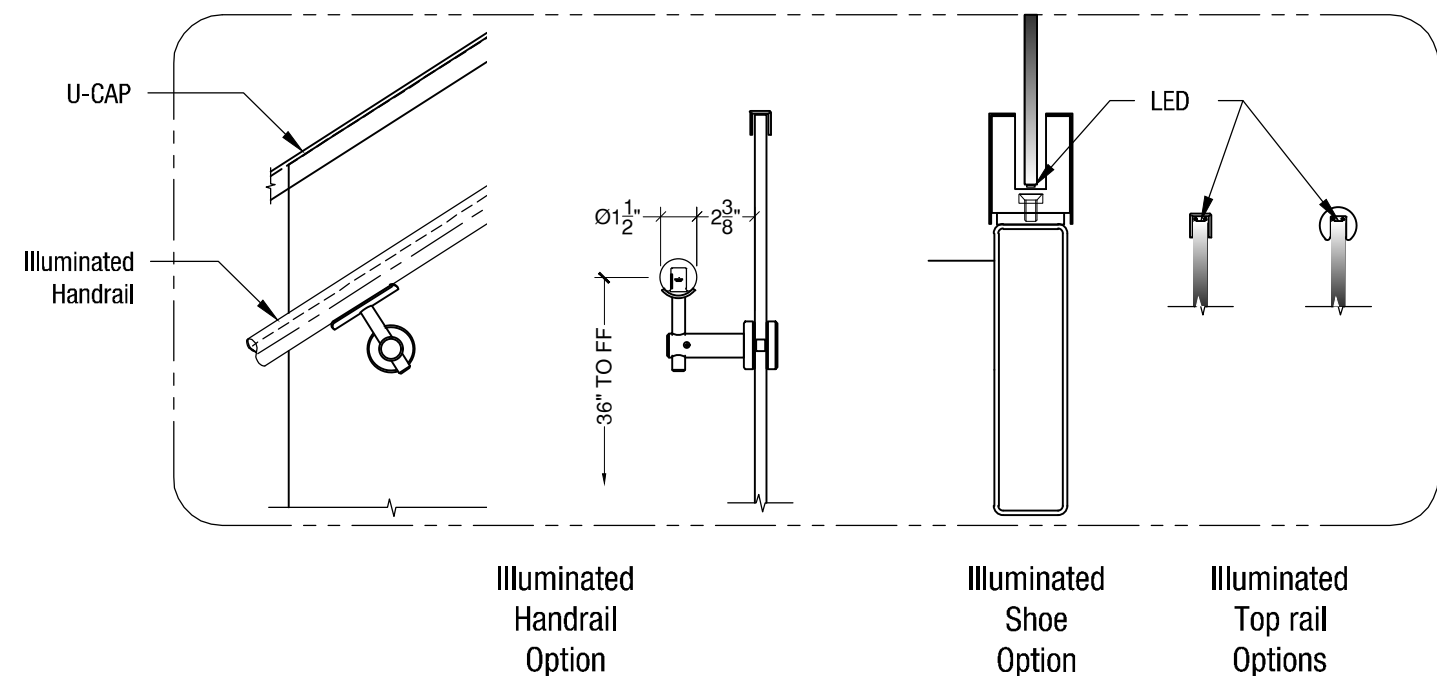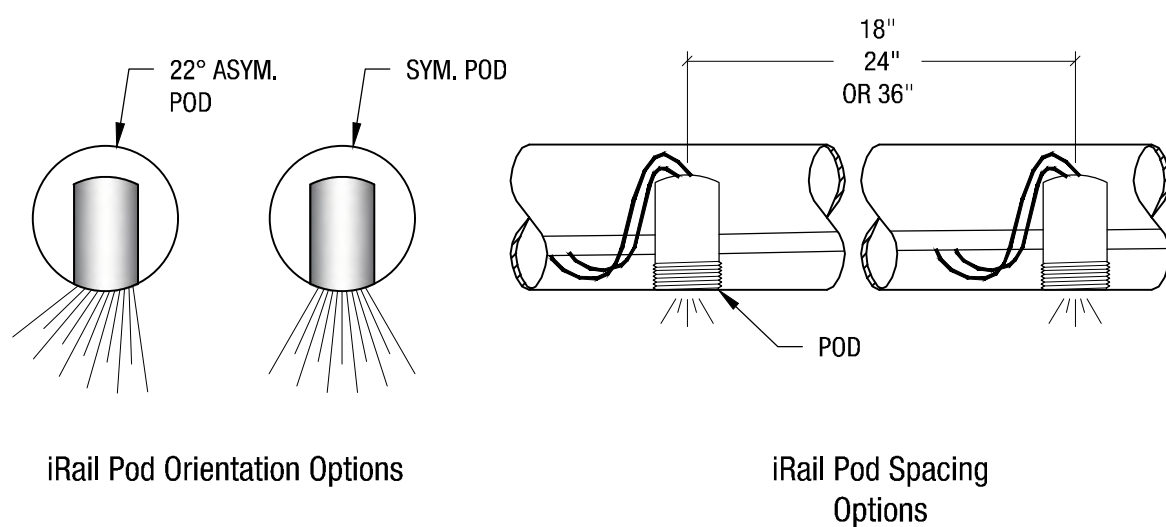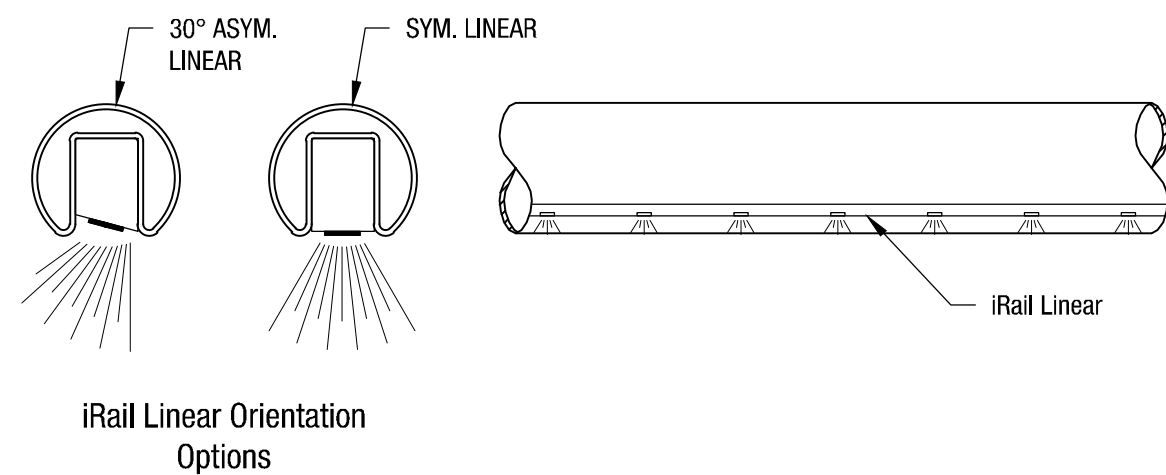

iRAIL LIGHTED RAILING SYSTEM



SHOE GLASS RAILING SYSTEM




FINISHING OPTIONS

#6 Satin



Powder Coat*

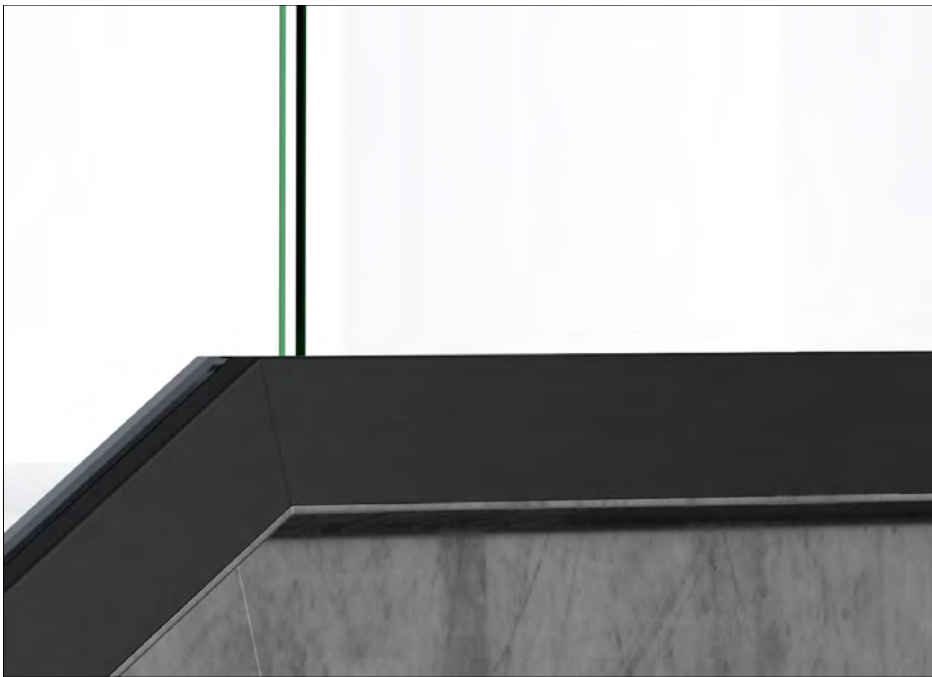

Powder coating is an environmentally-friendly option because it doesn't rely on solvents or chemical carriers. Instead, an electrostatic charge holds the paint to the steel, thus eliminating VOC emissions which will help in regards to LEED requirements. In addition, it meets AAMA specifications. Powder coating is durable and scratch resistant so it weathers and retains its original hue better than conventional liquid coatings.*



[POWDER COAT FINISHING OPTIONS](#)



SHOE GLASS RAILING SYSTEM PGA OF AMERICA HEADQUARTERS



HOME OF THE
PGA OF AMERICA

PGA OF AMERICA HEADQUARTERS - FRISCO, TX
General Contractor: Adolfson & Peterson Construction
Architect: Page Southerland Page



SHOE GLASS RAILING SYSTEM HALL ARTS HOTEL



HALL ARTS HOTEL - DALLAS, TX

General Contractor: Austin Commercial

Architect: HKS



SHOE GLASS RAILING SYSTEM UNIV. OF HOUSTON LAW CENTER



UNIVERSITY OF HOUSTON LAW CENTER - HOUSTON, TX

General Contractor: Austin Commercial

Architect: Shepley Bulfinch Richardson & Abbott, Inc





DESIGN + ENGINEER + FABRICATE + INSTALL


151 W. Vista Ridge Mall Dr. Lewisville, TX 75067

(Dallas/Fort Worth Metroplex)

PH: 972.353.8482 | info@vivarailings.com
vivarailings.com



Inc. Magazine 500 | 5000
VIVA RAILINGS, LLC.
Among The Fastest Growing
US Companies
Eight Years in a Row
2012-2019



Inc. Magazine 500 | 5000
VIVA RAILINGS, LLC.
Among The Fastest Growing
Texas Companies
#211



ICC-ES 4405 Certified
SHOE™
Structural Glass Railing System



LEED
Material & Resources Credits 4.1 and 4.2



The American Institute of Architects



The California Contractors State License
Board Certified

